


VR-1

Owner's Manual



VR-1
TV Volume Regulator

TERK



About Your TV Volume Regulator

VR-1

The VR-1 provides effective volume matching for television audio, DVDs, movies and more. With the VR-1, you will enjoy consistent audio levels when surfing from channel-to-channel, program-to-commercial, or between loud and noisy scenes of a movie.

WARNING - DO NOT CONNECT THE OUTPUT OF ANY AMPLIFIER TO THE INPUT OF THE TV VOLUME REGULATOR. PERMANENT DAMAGE WILL OCCUR.

The VR-1 can handle up to 4.6 volts Peak-to-Peak on the input.


1



Connecting Your VR-1; Basic Setup

VR-1

1. Use a set of red and white audio connection cables to connect the output of your source device (such as a cable box, satellite receiver, DVD player, VCR, etc.) to the INPUT of the VR-1.
2. Use another set of red and white connection cables (not included) to connect the OUTPUT of the VR-1 to the input of your TV or another signal control device (such as a stereo, home theater receiver, powered speakers, etc.).
3. Connect the A/C adapter to the DC input of the VR-1.
4. Plug the A/C adapter into a working electrical outlet.

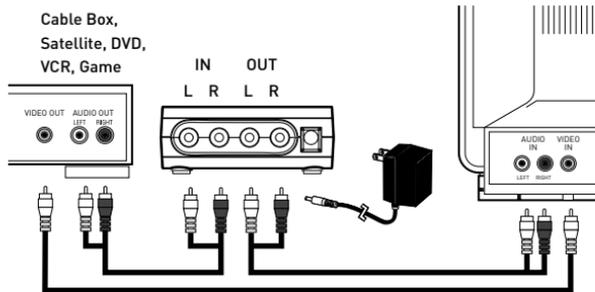


2

Connecting the VR-1; Tape Monitor Setup


VR-1

1. Use a set of red and white audio connection cables to connect the Tape Out of your stereo or home theater receiver to the INPUT of the VR-1.
2. Use another set of red and white connection cables (not included) to connect the OUTPUT of the VR-1 to the Tape Monitor input of your stereo or home theater receiver.
3. Connect the A/C adapter to the DC input of the VR-1.
4. Plug the A/C adapter into a working electrical outlet.

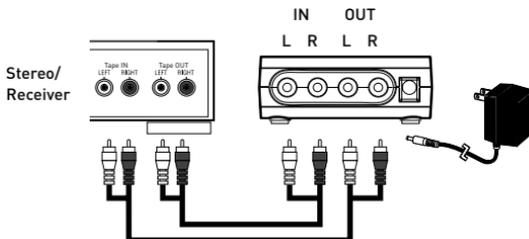

Note: You may need to enable the Tape Monitor feature on your stereo or home theater receiver. Please check the owner's manual of your system to determine how to do this.


3



Connecting the VR-1 from the Audio Outputs of Your TV

VR-1

1. Use a set of red and white audio connection cables to connect the audio output of your TV to the INPUT of the VR-1.
2. Use another set of red and white connection cables (not included) to connect the OUTPUT of the VR-1 to the input of your stereo or home theater receiver.
3. Connect the A/C adapter to the DC input of the VR-1.
4. Plug the A/C adapter into a working electrical outlet.

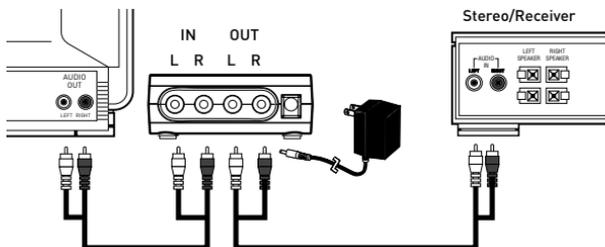

Note: You may need to enable the audio output feature of your TV. Please check the owner's manual of your system to determine how to do this.

4

Limited Warranty

TERK Technologies Corp. (TERK) warrants this product against defects in materials or workmanship for 1 year from the date of purchase. During this warranty period, this product will be replaced without charge. This warranty does not cover any damage due to acts of nature, commercial use, accident, misuse, abuse or negligence. This warranty is only valid in the USA. Replacement as provided under this warranty is the exclusive remedy of the consumer. TERK shall not be liable for any incidental or consequential damages for breach of any expressed or implied warranty on this product, except to the extent prohibited by applicable law. Any implied warranty or merchantability or fitness, for a particular purchase on this product, is limited to the duration of this warranty.

For more information, visit www.terk.com. or,
for technical support, call 1.800.942.TERK (8375).

102P005A

TERK is a registered trademark. The TERK logo is a trademark of the TERK Technologies Corp.